

C95-P Circle

Slim and minimalistic



C95-P375



C95-P675



C95-P525



C95-P825

C95-P Circle

Slim and minimalistic

Description

Glamox C95-P Circle is a series of circular luminaires for pendent mounting. The clean, minimalistic design with the fully illuminated surface makes this luminaire ideal for applications like reception rooms, stairwells, social areas, offices, meeting rooms and corridors.

C95-P Circle is available in two colours and four different diameters, Ø375, Ø525, Ø675 and Ø825. Why not make a design scheme by combining the different sizes? We also give you a choice between two different optics, opal and microprismatic. While opal optics gives a soft, even light, microprismatic optics is ideal when you want high quality lighting for work stations that complies to glare requirements.

One family, complete projects

Like the other members of the family, C95-P Circle is an edge lit luminaire with a very slim profile. The design has a distinct minimalistic and modern expression. The rest of the family comprises square and rectangular products of different dimensions for recessed, surface, pendent and wall mounting. By combining the C95-P Circle with the other C95 products, you can easily use the same product family throughout a big office or school project without running out of options.

Lighting for better human performance and well-being

The luminaire can also be supplied with tuneable white technology which means that it can be used in a Human Centric Lighting solution. Human Centric Lighting can be used to improve circadian rhythm and enhance human performance and well-being. Read more about Human Centric Lighting [here](#):

Emergency lighting solutions for improved safety

The luminaire can also be supplied with integrated emergency lighting systems (Standard, Selftest or DALI addressable), 1 or 3 hours. With a DALI addressable system, the emergency lighting and its batteries can be monitored through a Central Monitoring System that generates automatic reports.


Technical description

Light source	LED 1400 - 9000 lumen out Colour temperature 3000/4000 K, CRI Ra 80, MacAdams 3 Tuneable white (CCT)	Connection	In ceiling cup.
Driver	Electronic ballast (HF) or DALI. Driver life time up to 100.000 h/10 % (max failure) at Ta 25°C.	Optics	Opal (OP) or micro prismatic (MP).
Body material & colour	Die casted aluminium body, powder coated in white or grey structure.	Emergency system	Standard (S), Self test (ST) or DALI. 1h or 3h.
Mounting	Supplied with 3-point wire suspension, 2,5 or 5 m flexible power cable and ceiling cup.		


C95-P Circle

Slim and minimalistic


Measurement drawings

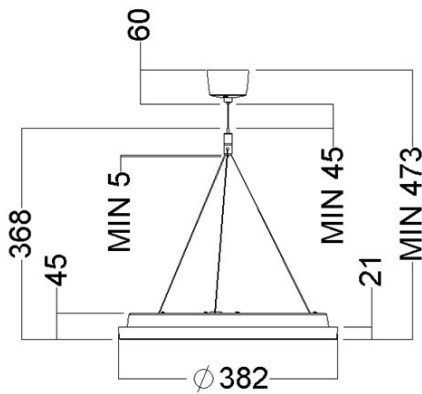


C95-P375 Circle

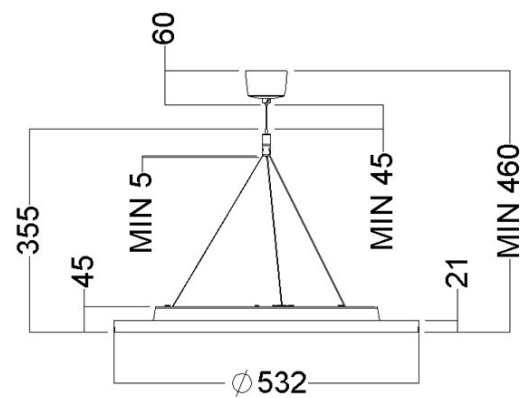

C95-P525 Circle

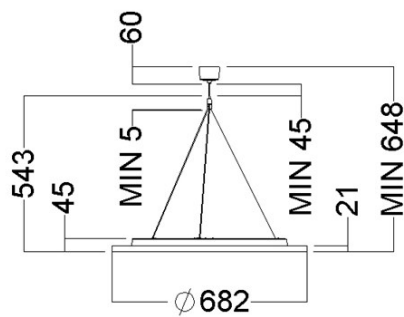

C95-P675 Circle


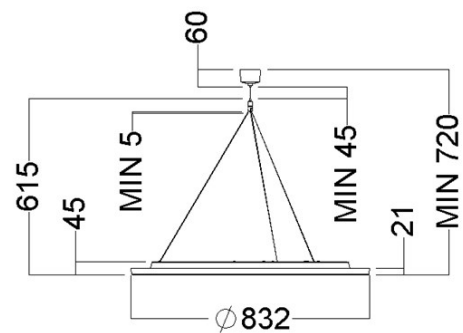


C95-P825 Circle

C95-P Circle

Slim and minimalistic

Light measurement drawings

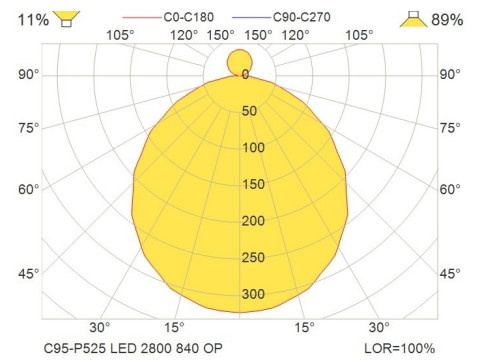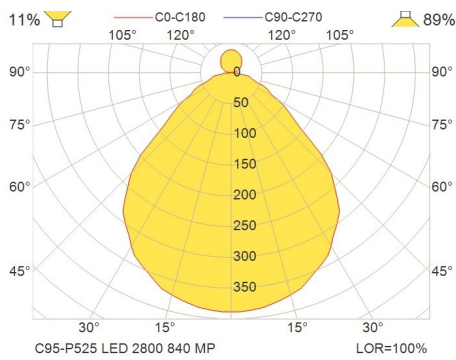

Energy label

