



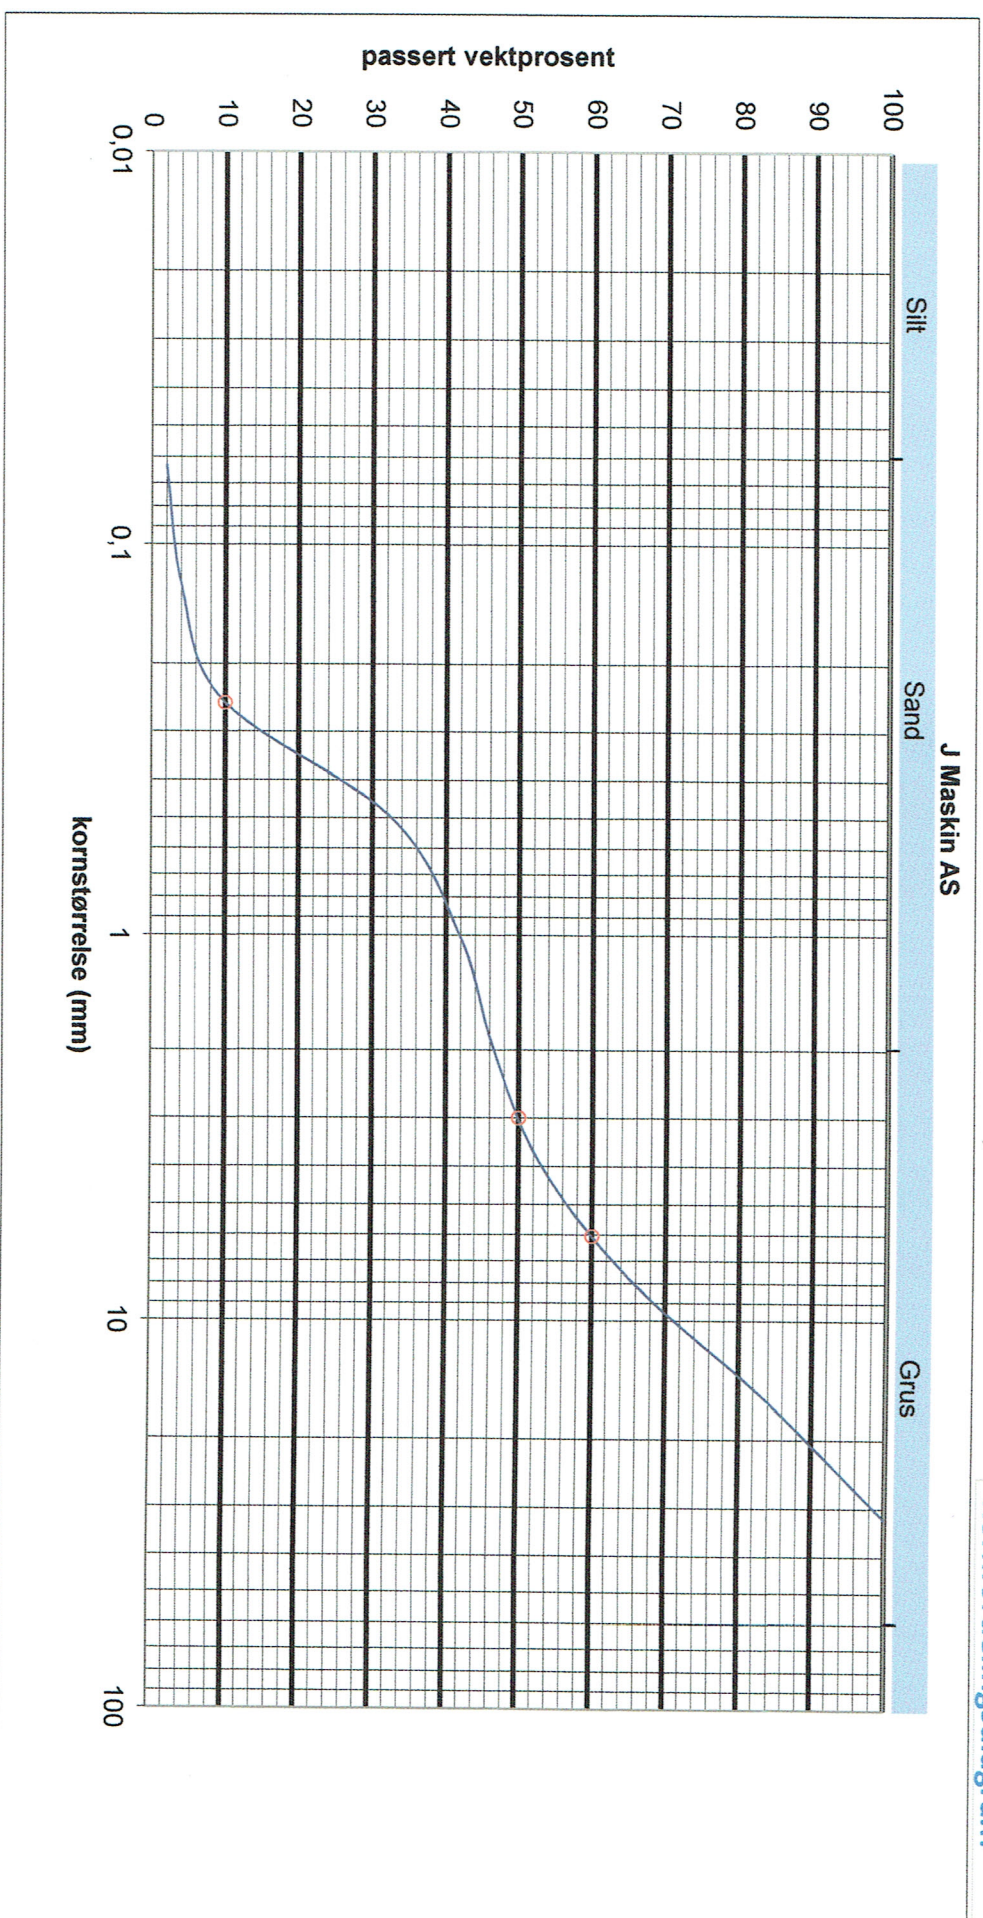

| sikt         | <0,063 | 0,063    | 0,125    | 0,25    | 0,5       | 1        | 2        | 4        | 8          | 16   | 32   |
|--------------|--------|----------|----------|---------|-----------|----------|----------|----------|------------|------|------|
| passert i%   | 0      | 1,998002 | 3,996004 | 9,74026 | 32,56743  | 41,85814 | 46,55345 | 53,14685 | 65,7342657 | 84   | 100  |
| passert vekt | 0      | 40       | 80       | 195     | 652       | 838      | 932      | 1064     | 1316       | 1680 | 2002 |
| Dyp          | D10    | D50      | D60      | S0      | Merknader |          |          |          |            |      |      |
|              | 0,253  | 3        | 6,050    | 23,913  |           |          |          |          |            |      |      |

Dato: 01.02.2021  
Sign: *Olav Nettle*

J Maskin AS

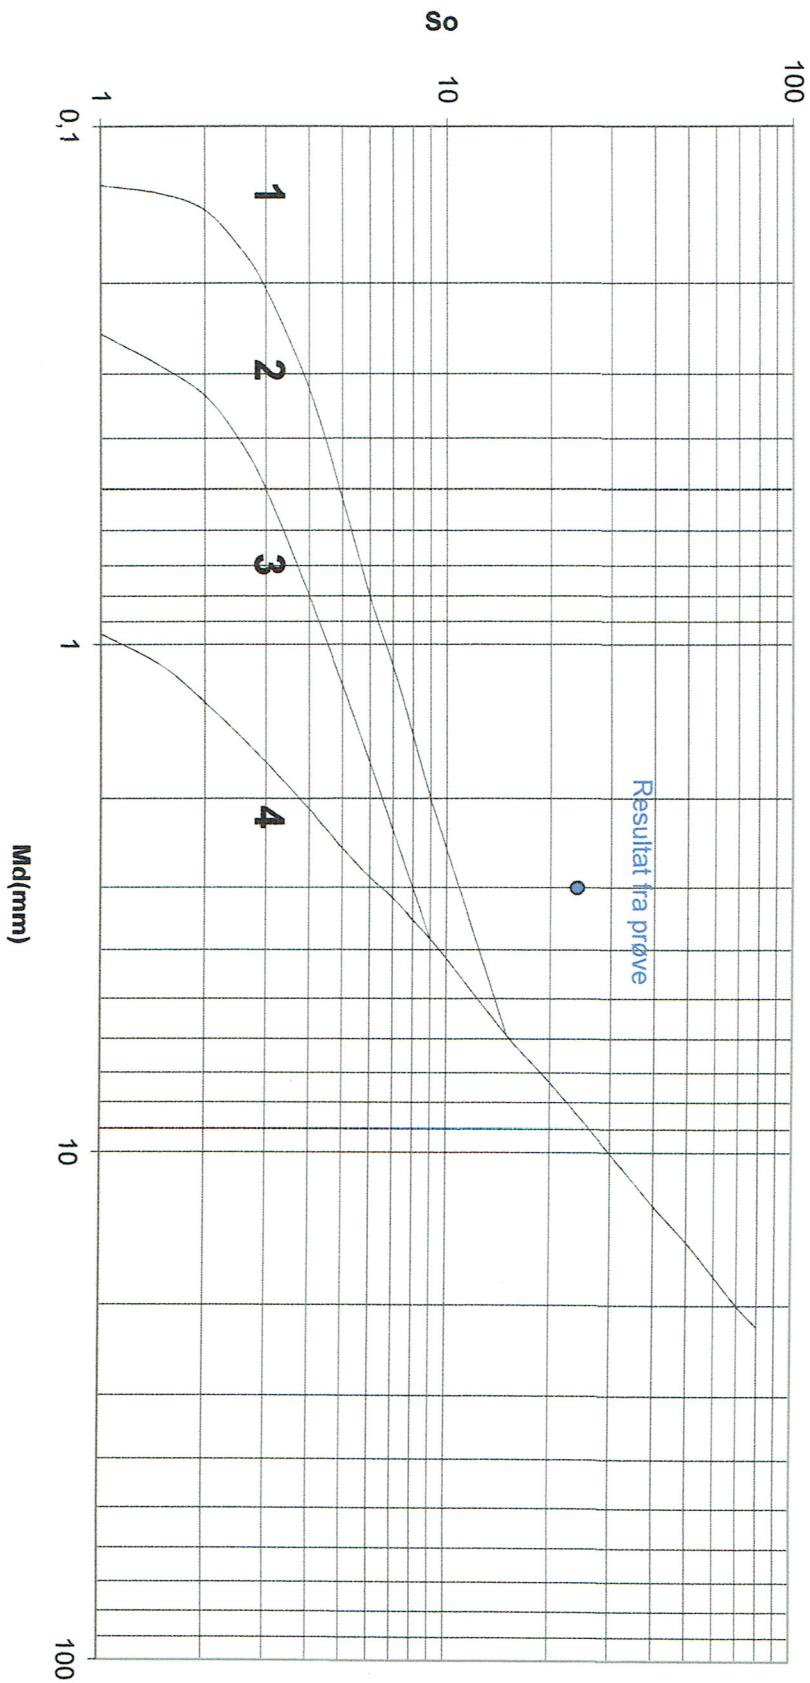

Gustafson's metode - Kun veiledende og kan ikke brukes direkte uten en totalvurdering

Hydrogeologi og AvløpsRådgivning

| $D_{10}$ | $D_{60}$ | U      | e     | $g(u)$ | $E(u)$ | k       | Permeabilitet- K verdi |
|----------|----------|--------|-------|--------|--------|---------|------------------------|
| 0,253    | 6,05     | 23,913 | 0,125 | 1,776  | 5563   | 3,6E-04 | 30,8 m/døgn            |

Resultat fra prøve : Klasse 1